


Customer:	3LGZ0	Customer P/N:	
-----------	-------	---------------	--

1.Mechanical Dimension:

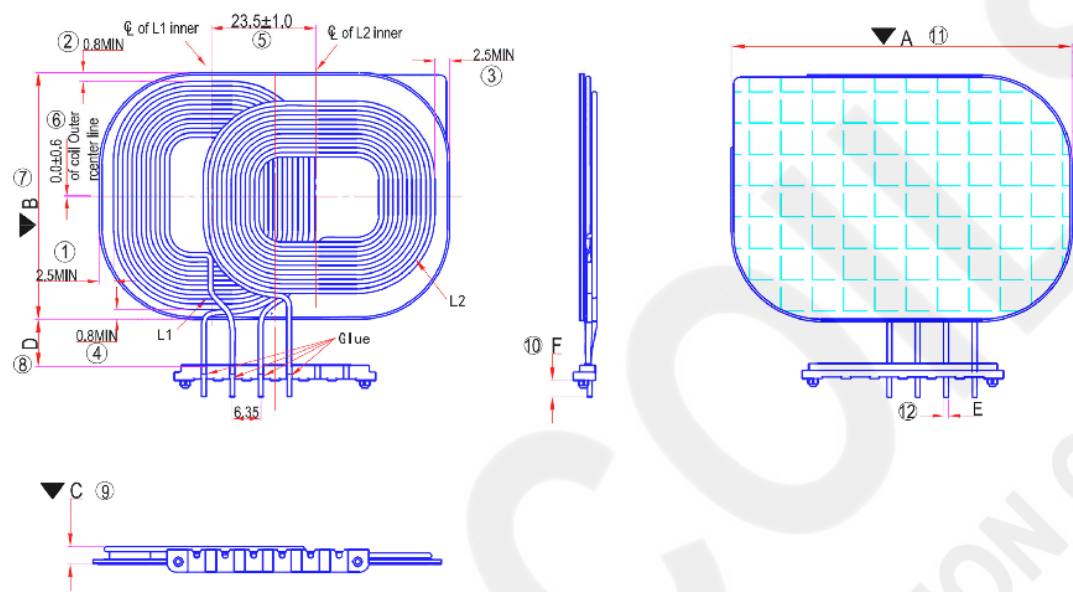

Item	Spec.(mm)	Typ.(mm)	Item	Spec.(mm)	Typ.(mm)
A	76.0+0.8	76.2	F	3.2+0.5	3.21
B	55.0+0.6	54.9	G		
C	4.5 MAX	4.22	H		
D	7.3+0.5	7.40	I		
E	1.35REF	1.15	J		

Notes:

3L P/N :	WPT765505M-12R5K-A13P	Rev.	XA	Date:	2025/07/14
----------	-----------------------	------	----	-------	------------

Customer:	3LGZ0	Customer P/N:	
-----------	-------	---------------	--

2. Electrical Characteristics (at 25degC / RH 65% unless otherwise specified):

Test Item	Specifications	Test conditions	Typ.	Test Instrument
L1	12.5uH±10%	@100KHz 1.0V	12.5uH	Agilent4284A
L2	11.5uH±10%	@100KHz 1.0V	11.5uH	Agilent4284A
DCR1	60mΩ MAX		53.54mΩ	ChenHwa502
DCR2	60mΩMAX		54.30mΩ	ChenHwa502
I rms	6.5AMAX			Agilent4284A
I sat	11A MAX			Agilent4284A
L1L2 TURNS	12TS 0.08X105P			
Ope.Temp	-40 TO 105℃			Testo608-H2
Weight	39.5g/pcs			

Notes :

3L P/N :	WPT765505M-12R5K-A13P	Rev.	XA	Date:	2025/07/14
----------	-----------------------	------	----	-------	------------