


Customer:	3LGZ0	Customer P/N:	
-----------	-------	---------------	--

1.Mechanical Dimension:

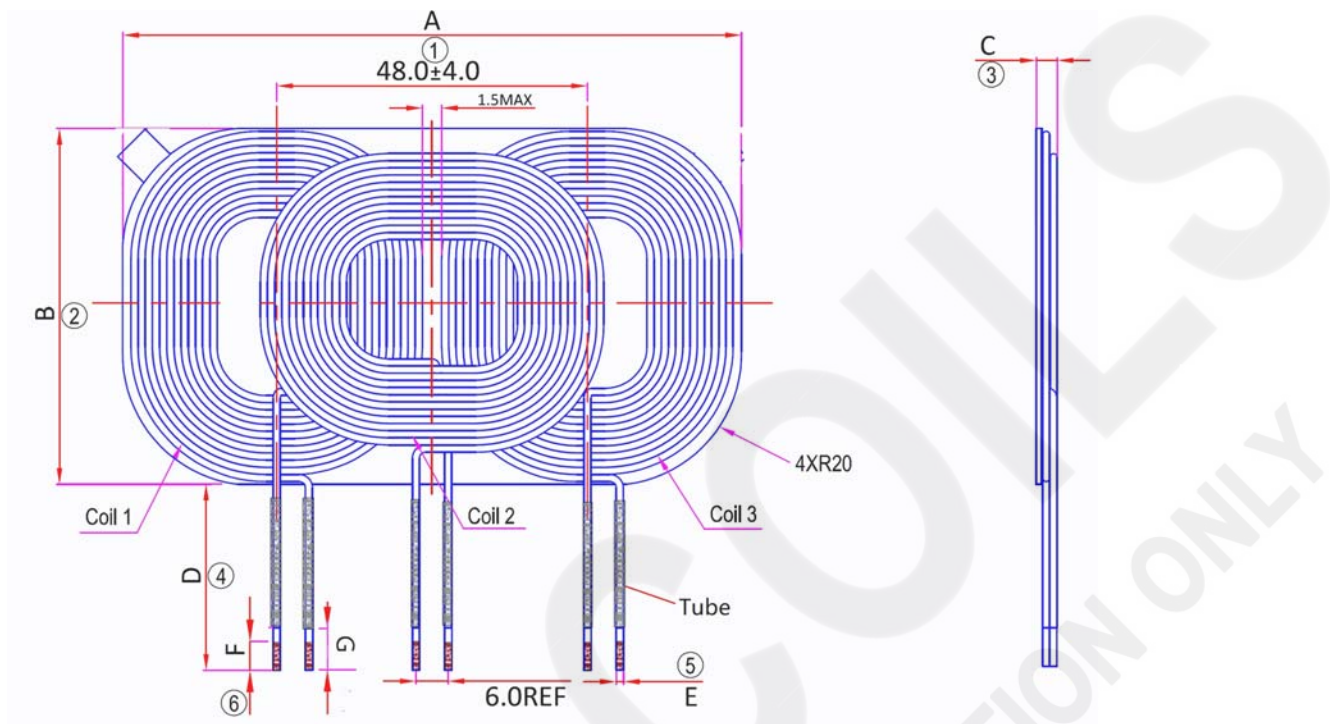

Item	Spec.(mm)	Typ.(mm)	Item	Spec.(mm)	Typ.(mm)
A	94.0±1.2	94.2	F	2.0±1.0	2.32
B	55.0±0.8	55.3	G	5.0±0.75	
C	3.8±0.0-0.2	3.80	H		
D	16.5±1.0	16.5	I		
E	1.5MAX		J		

Notes:

3L P/N :	WPT945504-12R5K-A13D2	Rev.	XA	Date:	2025/07/01
----------	-----------------------	------	----	-------	------------

Customer:	3LGZ0	Customer P/N:	
------------------	-------	----------------------	--

2. Electrical Characteristics (at 25degC / RH 65% unless otherwise specified):

Test Item	Specifications	Test conditions	Typ.	Test Instrument
L1=L3	12.5uH±10%	@100KHz 1.0V	11.95uH	Agilent4284A
L2	11.5uH+-10%	@100kHz1.0V	11.10uH	Agilent4284A
DCR1=DCR3	65mΩ MAX		55.93mΩ	ChenHwa502
DCR2	65mΩ MAX		54.31mΩ	ChenHwa502
Q1,Q2,Q3	70MIN	@100kHz1.0V	104uH	Agilent4284A
L1.L3 TURNS	12TS φ 0.08X105P			
L2TURNS	12TS φ0.08X105P			
Ope.Temp	-40 TO 105℃			Testo608-H2
Store.Temp	-20 TO 65℃			
Weight	43.20g/pcs			

Notes :

3L P/N :	WPT945504-12R5K-A13D2	Rev.	XA	Date:	2025/07/01
-----------------	-----------------------	-------------	----	--------------	------------